



Fransgård

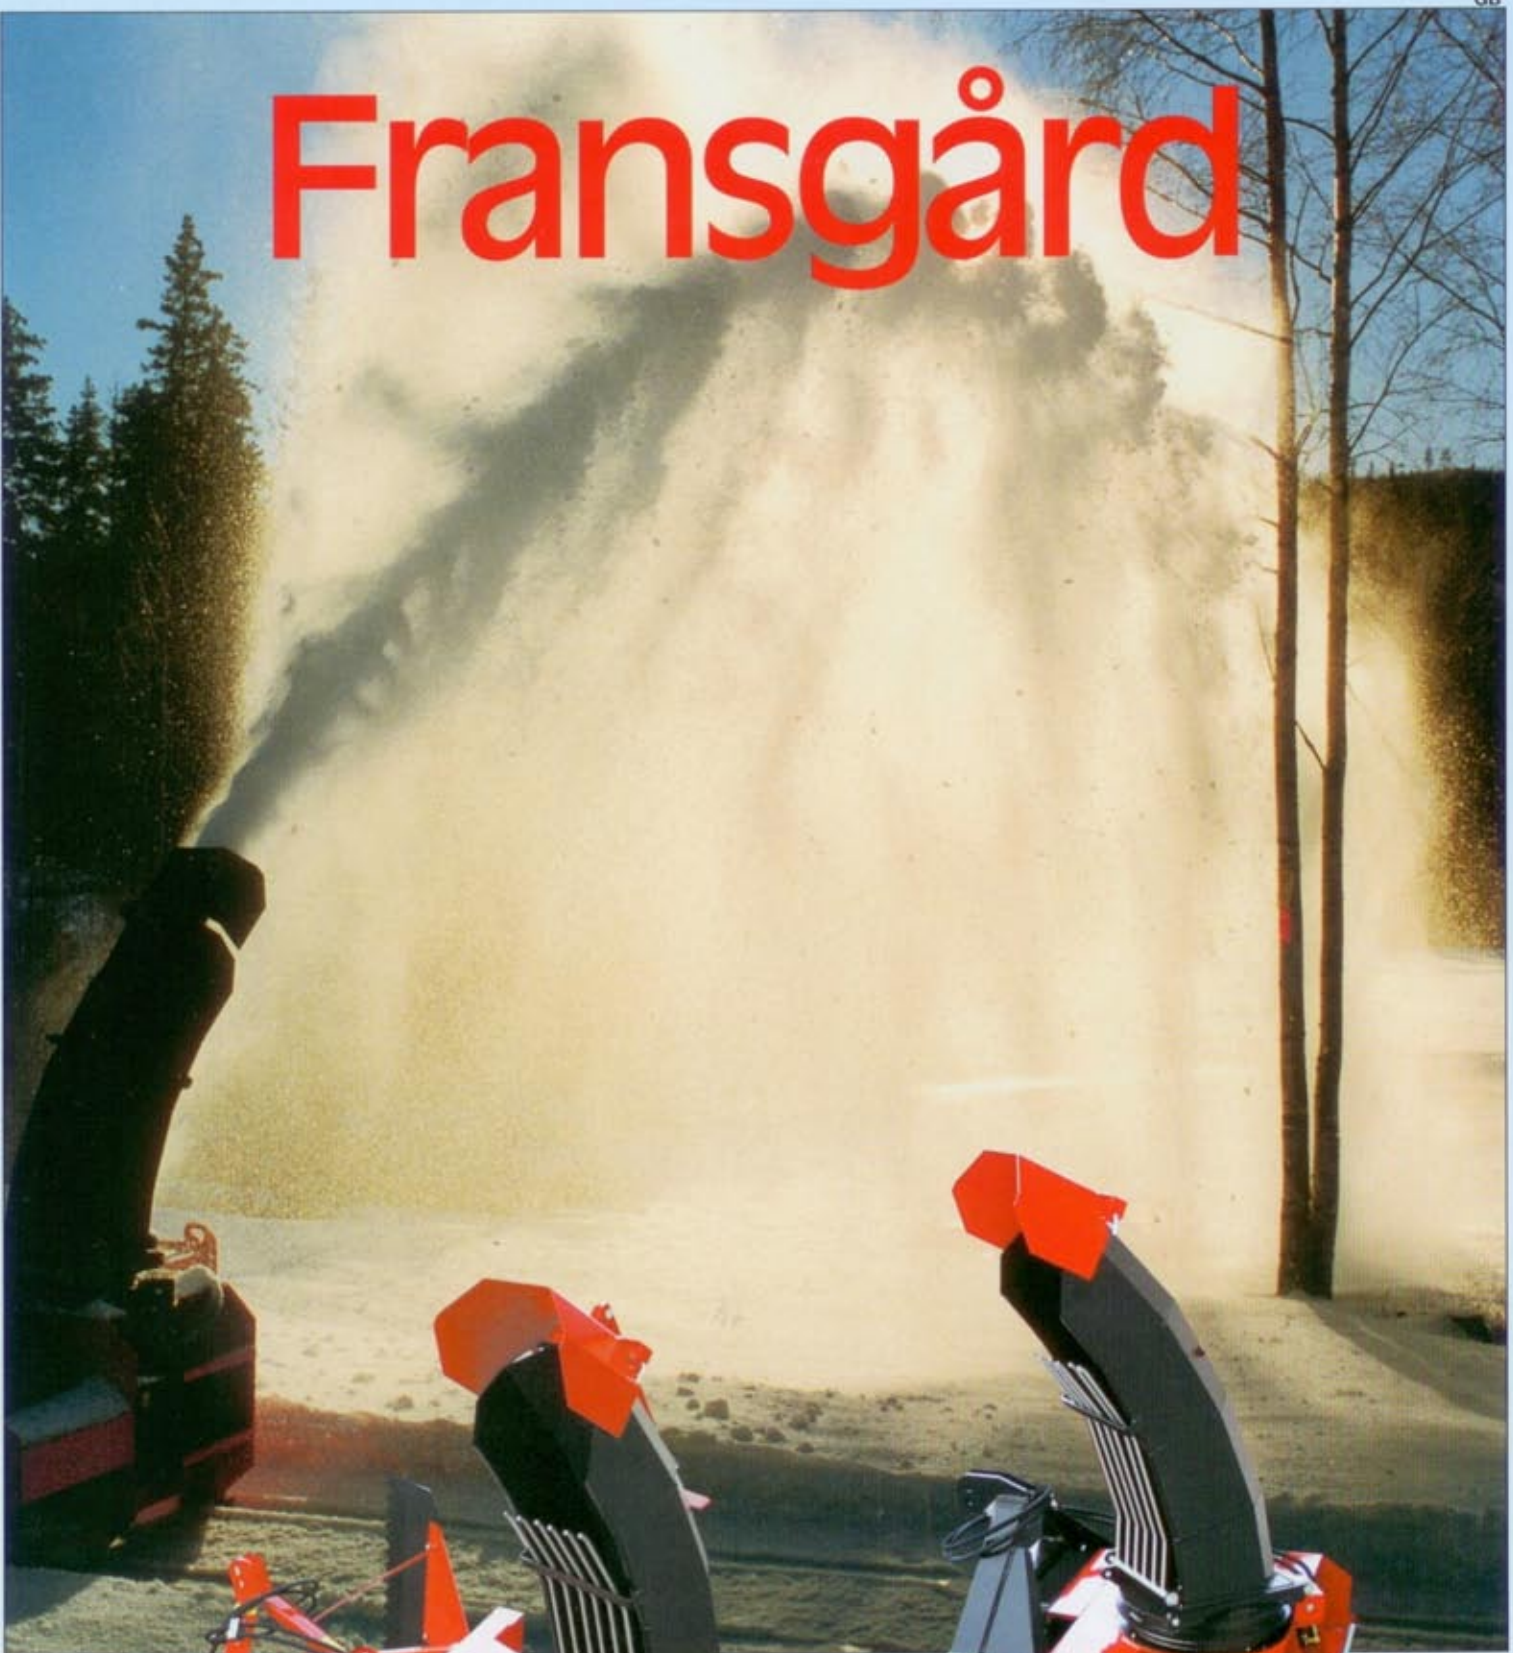

V-215 / V-230

S-220 / S-245 / S-245 proff

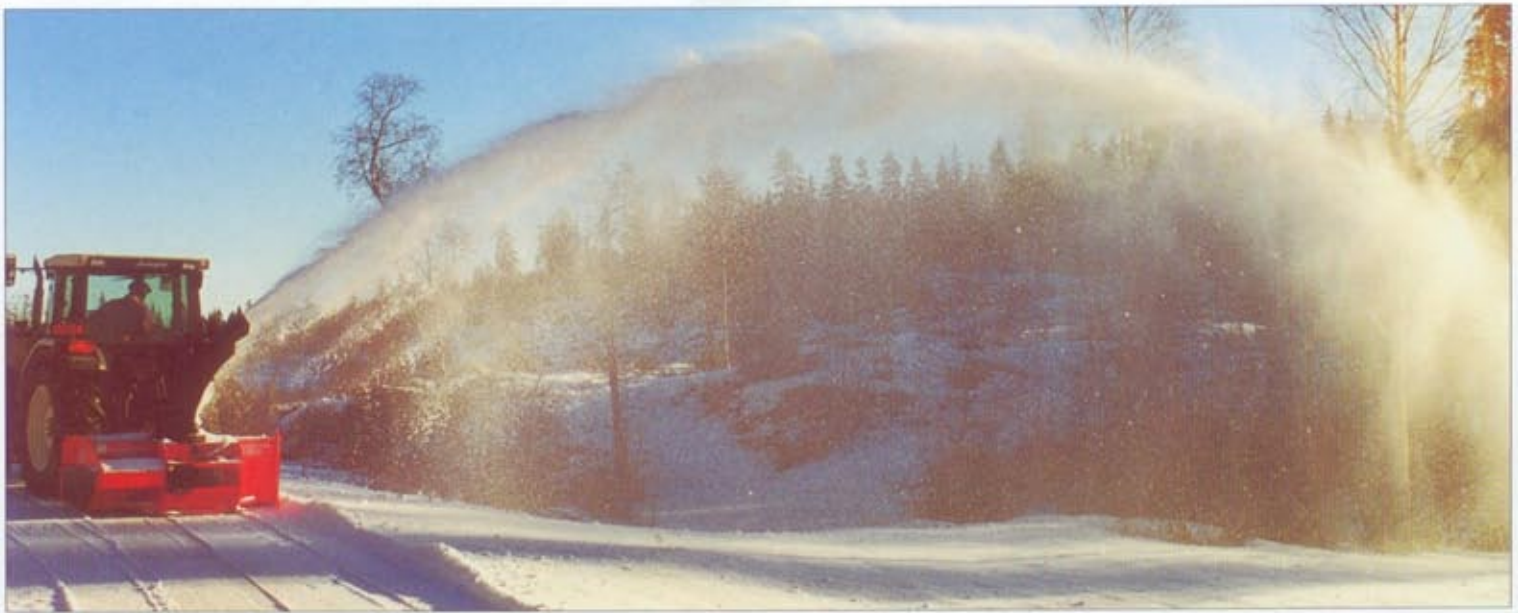

TECHNICAL DATA:	V-215		V-230		S-220		S-245		S-245 proff	
	Working width:	2,15 mtr.	85"	2,20 mtr.	87"	2,20 mtr.	87"	2,45 mtr.	96"	2,45 mtr.
Working width with side strip:	2,25 mtr.	88"	2,30 mtr.	91"	2,25 mtr.	89"	2,50 mtr.	98"	2,50 mtr.	98"
Machine length (max.):	170 cm	67"	175 cm	69"	120 cm	47"	138 cm	54"	142 cm	56"
Machine height (max.):	135 cm	53"	215 cm	85"	204 cm	80"	210 cm	83"	230 cm	91"
Weight:	430 kg	948 lbs.	440 kg	970 lbs.	560 kg	1.235 lbs.	660 kg	1.455 lbs.	830 kg	1.820 lbs.
Length of fans:	310 mm	12"	330 mm	13"						
Auger diameter:		†		†	350 mm	14"	350 mm	14"	430 mm	17"
Number of fan blades:	6		6		4		4		4	
Fan diameter:	630 mm	25"	720 mm	28"	660 mm	26"	720 mm	28"	800 mm	31"
Snow height (max.):	60 cm	24"	64 cm	25"	65 cm	26"	65 cm	26"	83 cm	33"
Length of snow discharge:	10-30 m	30-100"	10-30 m	30-100"	10-30 m	30-100"	10-30 m	30-100"	15-40 m	49-130"
Direction of chute:	1 x left / 1 x right		360 degrees		360 degrees		360 degrees		360 degrees	
Output per minute:	7-8 m³	76-86 ft³	8-10 m³	86-108 ft³	9-10 m³	97-108 ft³	10-12 m³	108-129 ft³	12-15 m³	129-161 ft³
PTO speed:	540 rpm		540 rpm		540 rpm		540 rpm		540 rpm	
3-point linkage pins:	cat. I/II		cat. I/II		cat. I/II		cat. I/II		cat. I/II	
Tractor power (approx min.):	35 HP	25 kW	45 HP	33 kW	45 HP	33 kW	50 HP	37 kW	70 HP	51 kW



Fransgård has also a wide range of forestry winches and levellers.

Since we are constantly innovating our designs, we reserve the right to making technical changes without notice.



© Fransgård - Printed in Denmark by Rebel A/S - 80800-018

Fransgård

Fransgård Maskinfabrik A/S
 Fredbjergvej 132 · DK-9640 Farsø
 Tel. +45 98 63 21 22 · Fax +45 98 63 18 65

Fransgård



V-3004 V-3507
V-4000 V-6500

Technical data:

	V-3004		V-3507 <small>New 2007</small>		V-4000		V-6500	
Pulling power	3 tonne	6600 lbs.	3,5 tonne	7275 lbs.	4 tonne	8800 lbs.	6,5 tonne	14300 lbs.
Weight	175 kg	385 lbs.	185 kg	408 lbs.	298 kg	657 lbs.	441 kg	972 lbs.
Drum capacity of cable:								
diameter	8 mm	5/16"	8 mm	5/16"	10 mm	3/8"	11 mm	7/16"
length / recommended length	45 / 40 m	150 / 130 ft.	45 / 40 m	150 / 130 ft.	60 / 50 m	200 / 164 ft.	80 / 50 m	260 / 164 ft.
Pulling speed per second (by 540 rpm)	0,6 → 1,5 m	2 → 5 ft.	0,6 → 1,5 m	2 → 5 ft.	0,6 → 1,5 m	2 → 5 ft.	0,6 → 1,5 m	2 → 5 ft.
Height (total with protection screen)	1,45 m	57"	1,55 m	61"	1,75 m	69"	2,15 m	85"
Protective screen ↑ x ↔	71x104 cm	28" x 41"	71x104 cm	28" x 41"	71x104 cm	28" x 41"	71x104 cm	28" x 41"
Top pulley ↑	120 cm	47"	130 cm	51"	150 cm	59"	180 cm	71"
Lower pulley ↑ (optional V-3004 + V-3507)	42 cm	17"	48 cm	19,3"	75 cm	30"	85 cm	34"
Log dozerblade ↑ x ↔	38x100 cm	15" x 40"	49x125 cm	19" x 50"	55x150 cm	22" x 59"	70x150 cm	22" x 59"
PTO attachment height	38 cm	15"	49 cm	19,3"	50 cm	20"	57 cm	23"
3-point linkage		Cat. I		Cat. I		Cat. I & II		Cat. II & III
Tractor power (min. - max.)		25-45 HP / hk		25 x 45 HP/hk		35-65 HP / hk		60-110 HP / hk

Standard equipment:

Cable drum locking latch
 Protective screen
 Cable drum tension bracket
 Holder for chains and accessories
 Lower pulley (V-4000 + V-6500)
 Dozerblade with wide towing bar

Optional equipment:

Lower pulley for V-3004 + V-3507

**Accessories:**

Wire including hook
 Choker (slider)
 Forestry chains
 PTO shaft
 Distance pulley



Since we are constantly innovating our designs, we reserve the right to making any technical changes!

MANUFACTURER:

Fransgård

Fransgård Maskinfabrik A/S
 Fredbjergvej 132 · DK-9640 Farso
 Tel. +45 98 63 21 22 · Fax +45 98 63 18 65
 www.fransgard.dk

Fransgård



GT-210 front
 GT-250 front
 GT-250 S front

GT-210
 GT-250
 GT-250 S
 GT-250 HY



ACCESSORIES



Counter weight box is available for GT models.
Does not fit model GT-250HY.



Wide gauge wheels are fitted with long-wearing double bearings and flotation treads.



Rubber wearing strips, mounted under the cutting edges provide protection to hard surfaces. (asphalt, concrete etc.)



A hydraulic toplink with attachment brackets is available for blade adjustment.



The snow wing is puts a finishing touch to snow removal. The wing creates an angle on the snow edge preventing the snow from sliding back down.



The side/end plate can be fitted both to the right and left hand side (blade height 60cm/23,6 in). Mounted with three bolts.

Technical data:	GT-210	GT-210 front	GT-250	GT-250 front	GT-250S	GT-250S front	GT-250HY
Working width	2,10 m / 7'	2,10 m / 7'	2,50 m / 8'2"	2,50 m / 8'2"	2,50 m / 8'2"	2,50 m / 8'2"	2,50 m / 8'2"
Blade height	60 cm / 23,6 in	60 cm / 23,6 in	60 cm / 23,6 in	60 cm / 23,6 in	60 cm / 23,6 in	60 cm / 23,6 in	60 cm / 23,6 in
Cutting edge reversible	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Wheels	Option	Option	Option	Option	Option	Option	Option
Offset adjustment	50 cm / 19,7 in	20 cm / 7,9 in	50 cm / 19,7 in	20 cm / 7,9 in	50 cm / 19,7 in	20 cm / 7,9 in	50 cm / 19,7 in
Blade rotation	360°	360°, dismount	360°	360°, dismount	360°	360°, dismount	270°, hydraulic
Vertical blade adjustment	1 pos.	1 pos.	1 pos.	1 pos.	3 pos.	3 pos.	1 pos.
Horizontal blade adjustment	0° or 7°	0° or 7°	0° or 7°	0° or 7°	0° or 7°	0° or 7°	0° or 7°
Hydraulic blade adjustments	Option	-	Option	-	Option	-	Standard
3-point linkage pins	Cat. I/II	Cat. I/II	Cat. I/II	Cat. I/II	Cat. I/II	Cat. I/II	Cat. I/II
Weight/lbs excl. wheels	360 kg / 793 lbs	340 kg / 750 lbs	385 kg / 849 lbs	365 kg / 805 lbs	425 kg / 937 lbs	405 kg / 893 lbs	450 kg / 992 lbs

ALSO IN THE FRANSGÅRD SALES PROGRAM...



5 Snow blower models for front and rear mounting.



Back tip shovel:
T-200 with rear board.
T-220 with automatic dumping.



The biggest world wide range of multi function rakes: 9 models.



Since we are constantly innovating our designs, we reserve the right to making any technical changes!

Producent:

Fransgård

Fransgård Maskinfabrik A/S
Fredbjergvej 132 · DK-9640 Farso
Tel. +45 98 63 21 22 · Fax +45 98 63 18 65
www.fransgard.dk

Fransgård



- GT-250P**
- GT-300P**
- GT-250PH**
- GT-300PH**



ACCESSORIES



Side boards:

Reinforced and will fit both right and left hand sides (includes 3 bolts)

Hydraulic side adjustment cylinder:
(can be retrofitted)

Additional hydraulic valve sections (3 are to perform all functions hydraulically):

- Hydraulic valve block (with 3 sections)
- Hydraulic valve block (with 2 sections)



Wear strips :

- Rubber
- Serrated/serrated
- Straight/serrated
- Straight/straight

Technical data:	GT-250P	GT-300P	GT-250PH	GT-300PH
Working width (max)	2,50 m / 8'2"	3,00 m / 10'	2,50 m / 8'2"	3,00 m / 10'
Blade height	70 cm / 27,5 in	70 cm / 27,5 in	70 cm / 27,5 in	70 cm / 27,5 in
Wearing strips reversible (3 models)	Yes	Yes	Yes	Yes
Wheels 360 degree rotation	21x6.00 / 6 ply	21x6.00 / 6 ply	21x6.00 / 6 ply	21x6.00 / 6 ply
Blade hydraulic adjustment	230°	230°	230°	230°
Lateral adjustment mechanic or hydraulic	50 cm	60 cm	50 cm	60 cm
Horizontal Tilt adjustment (Hydraulic)	No	No	+/- 20°	+/- 20°
Hydraulic outputs (double action)	1 or 2	1 or 2	3	3
3 point hitch	Cat II / III	Cat II / III	Cat II / III	Cat II / III
Weight	720 kg / 1,590 lbs	780 kg / 1,729 lbs	880 kg / 1,940 lbs	940 kg / 2,075 lbs

FRANSGÅRD ALSO OFFERS:



Many models of winches 2,8 → 9 tons / 6,200 lbs → 19,850 lbs.



NEW Swath wilther very suitable for silage and to prevent dirt from getting into the swath.



Forestry tong with 2,3 m / 7'5" jaw opening and hydraulic swing cylinder.



Large selection of levellers including front-mount, very suitable for levelling, snow removal, cleaning etc.



www.fransgard.dk
We reserve the right to modify and change specifications without notice.

Producent:

Fransgård

Fransgård Maskinfabrik A/S
Fredbjergvej 132 · DK-9640 Farsø
Tel. +45 98 63 21 22 · Fax +45 98 63 18 65
www.fransgard.dk

Fransgård

Sand spreader SPR-250



The agitator of the spreader may be activated or disengaged by pulling and turning the black lever on the wheel.

Three point hitch mounting is standard, but an optional draw tongue is available. A hydraulic motor mount is standard, if hydraulic operation of the spreader is required.



Technical data:

Working Width	120 cm/48"
Container volume	250 L/65 gal.
Weight	130 kg/285 lb.

Fransgård

Sand spreader SPR-800 – SPR-1000



Selfloading



The sturdy and robust frame is fitted with a hydraulic powered agitator that will provide constant distribution of the material. The outlet may be adjusted manually to regulate the flow of the material.

Different mounting plates (SMS, EURO, 3- point) are secured with 1 bolt. Two support legs provide stability when the machine is not in use.



Technical data:

Working width	200 CM/80 in.	200 CM/80 in.
Container volume	800 L/210 Gal US	1.000 L/265 Gal US
Weight	320 KG/700 lb.	350 KG/770 lb.

Fransgård

Forest grapple SK-950



For front end loader with SMS or Euro bracket.
Strong double acting hydraulic cylinder ensures safe lifting of logs.
When the grapple is closed it works the top arm works as support leg.

Technical data:

Opening width	950 mm
Hydraulic output	1 double acting
Weight	150 kg